

Characteristics



- High performance industrial air curtains for vertical or horizontal installations for large industrial doors. Available in 1.5, 2.0 and 2.5 meters length. Easy dockable modules to reach large dimensions.
- Heavy self-supporting casing construction made of galvanized steel plate, finished in structural epoxy-polyester painting white colour RAL9016 as standard. Other colours are available on request.
- Double outlet with Coanda effect to achieve larger and efficient air jet. Anodized aluminium outlet vanes, airfoil shaped, adjustable from 0 to 15° each side.
- High efficiency and low noise axial fans, driven with external rotor motor single phase 230V. Optionally three phase 400V. Provided with 5-speed selection. Maintenance free.
- "P" type with water heated coil. "A" type without heating, air only.
- Regulation not included. Optional:
 Basic regulation with Plug&Play control panel, 10m RJ45 cable and remote control.

 Advanced regulation with Clever (automatic, intelligent, energy saving, Modbus RTU for BMS...).


Specifications

AIR ONLY					
		Fans Power	Fans Current	Noise Level	
Model	Airflow	230V-50Hz	230V-50Hz	(5 m)	Weight
				٠,	•
	m³/h	kW	А	dB(A)	kg
MXW 1500 A	m ³ /h 7000	0,68	A 2,96	dB(A) 60	kg 79
MXW 1500 A MXW 2000 A			A 2,96 4,44	- ()	

WATER HEATI	ED										
Model	Airflow m ³ /h	Water Heating Capacity 80/60°C	P86 Water Drop Pressure 80/60°C	Water Connections 80/60°C	Water Heating Capacity 60/40°C	P64 Water Drop Pressure 60/40°C	Water Connections 60/40°C	Fans Power 230V-50Hz	Fans Current 230V-50Hz	Noise Level (5 m) dB(A)	Weight
MXW 1500 P	6800	41,39	12040	2x11/4"	34,09	12620	2x1½"	0,68	2,96	59	95
MXW 2000 P	10200	61,25	16920	2x11/4"	50,16	13660	2x11/4"	1,02	4,44	60	126
MXW 2500 P	13600	80.05	13940	2x11/4"	66.19	14600	2x11/4"	1.36	5.92	61	158

Water heated: P86 2 rows coil, P64 3 rows coil. Electrical heated models available on customer request. Let us know your needs.

Dimensions

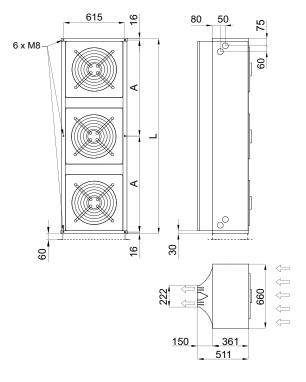

	L	Α
MXW 1500	1500	734
MXW 2000	2000	984
MXW 2500	2500	1234