

# SITALI SF 150

SITALI SF 150 Cod. 99431

Alternate single flow decentralised **C**ontrolled **M**echanical **V**entilation with heat recovery



## FEATURES

Temperature probe that adjusts the air flow inversion times to maintain the indoor comfort level

Energy class: **A**

EC brushless motor

Integrated humidity sensor

Easy maintenance, indoor magnetic release

Infra-red remote control with LCD

Double filter on the inner/outer side of the exchanger

Multicolour LED indicator

5 ventilation speeds available

Magnetic wall support for remote control



## SILENT FUNCTION

The most silent: only **10 dB(A)**  
Optimised for continuous 24/24h operation.




## INTELLIGENT FUNCTION

Thanks to the presence of the temperature detection probe, the air flow inversion time is self-adjusted to allow the best comfort indoors.




## MAGNETIC FUNCTION

Quick release via magnets for easy maintenance without the need for specialised staff.

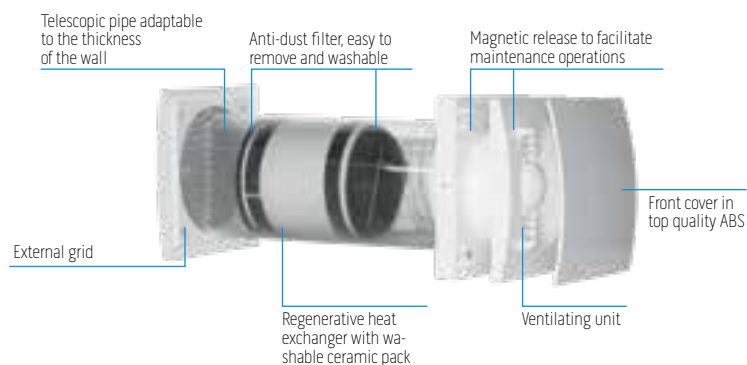


### remote control unit as per standard

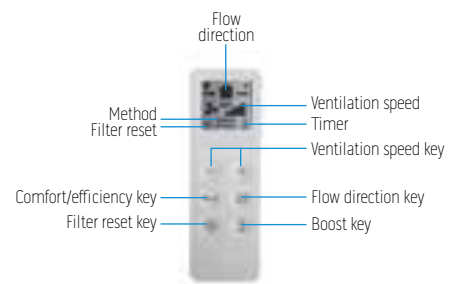

### TWO METHODS

**Comfort:** best acoustic comfort for use during the night  
**Efficiency:** best efficiency at maximum power

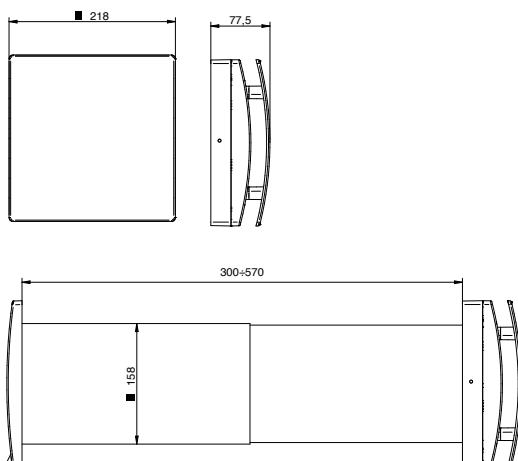

TECHNICAL DATA	SF 150
Product code	99431
Hole diameter mm	160
Energy class	A
Flow rate aria m <sup>3</sup> /h	60 / 50 / 40 / 30 / 20
Sound pressure db(A)*	29 / 24 / 20 / 14 / 10
absorption W	6 / 4,5 / 3,5 / 2,5 / 2
Thermal efficiency max	82%
Environment temperature °C max	-20°C +50°C
IP protection rating	IPX4
Weight kg	5,5

220-240 V ~ 50-60Hz aerulic performance measured according to ISO 5801 at 230V 50Hz, density of the air 1.2 Kg/m<sup>3</sup> - data measured in accredited TÜV Rheinland laboratory  
\* sound pressure level at 3m in free field